

GENERAL RESIN RIBBON

Thermal Transfer Ribbon

R933 is an excellent general resin thermal transfer ribbon. It has excellent scratch resistance, clear printing and good alcohol resistance, can adopt fast printing speed, and is a special resin that can print paper labels and various film labels.



APPLICATIONS


MEDICAL SERVICED INDUSTRY
MECHANICAL EQUIPMENT
AUTOMOBILE INDUSTRY LABELS
OUTDOOR PRODUCT LABELS



RECOMMENDED SUBSTRATES

Polypropylene	Polyimide
Polyethylene	Polystyrene
Polyvinyl Chloride(PVC)	Polyethylene(PE)
Any Other Synthetic Papers	PET

TECHNICAL SPECIFICATIONS

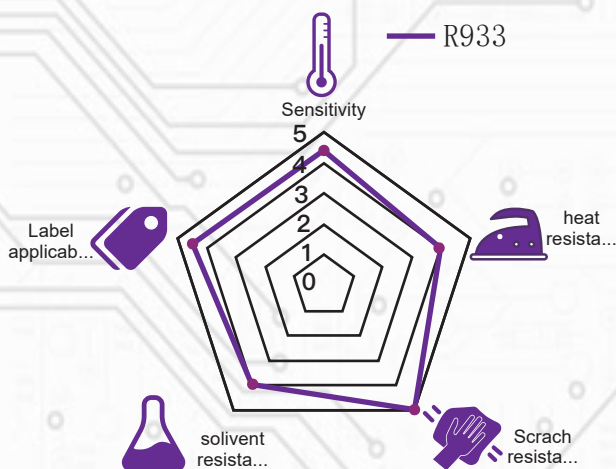

RIBBON PROPERTIES

Ink	Resin
Color	Black
Base Film Thickness	4.5 ± 0.3
Total Thickness	6.8 ± 0.5
Ink melting point	105°C
Printing speed	2-10IPS

CERTIFICATIONS



TECHNICAL CHARACTERISTICS

- EXCELLENT SCRATCH RESISTANCE
- EXTENSIVE LABEL APPLICABILITY
- CLEAR PRINTING, GOOD BLACKNESS
- HIGH SENSITIVITY




STORAGE CONDITIONS

- 12 months recommended
- 20-85% Relative Humidity
- -5-40°C temperature

WEBSITE

MINGYOU

<http://www.mingyo.com.cn>



Add: No.33 Ma'an Road,
Tongan Rare Earth Industrial Park,
Xiamen, Fujian, CN

Tel: 86-592-7032981
E-mail: vicky-zhang@mingyo-ttr.com
lily.yang@mingyo-ttr.com