

COLOR WAX/RESIN RIBBON

Thermal Transfer Ribbon

Color thermal transfer ribbon, which is based on wax/resin, has excellent printing applicability, scratch resistance and bright and clear imprint.



RIBBON PROPERTIES

| | |
|---------------------|-----------|
| Ink | Wax/Resin |
| Color | Black |
| Base Film Thickness | 4.3 ± 0.3 |
| Total Thickness | 7.5 ± 0.5 |
| Ink melting point | 78°C |
| Printing speed | 2-10IPS |

CERTIFICATIONS



ROHS2.0



REACH



ISO9001/14001




MSDS

HALOGEN

HALOGEN

TECHNICAL SPECIFICATIONS

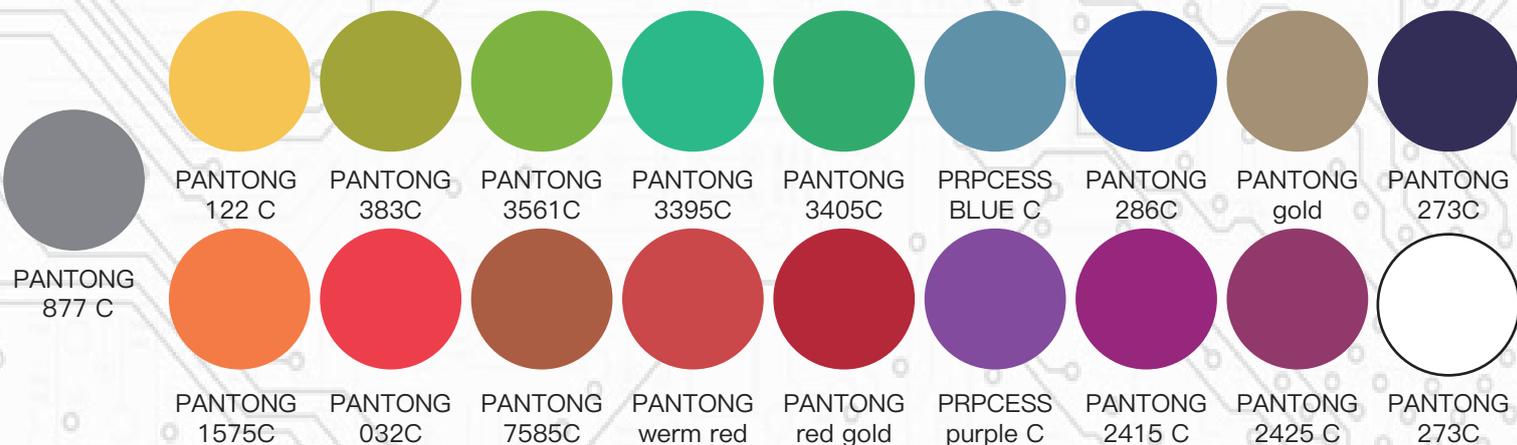

CUSTOMIZE AVAILABLE...

RECOMMENDED SUBSTRATES

| PAPER | | ECONOMY SYNTHETICS | |
|--------------|----------------|----------------------------|-------------|
| Coated paper | Uncoated paper | Polyethylene | Polyolefin |
| Coated tag | Uncoated tag | Polypropylene | Polystyrene |
| Art paper | | Any Other Synthetic Papers | |
| Rough paper | | | |



STORAGE CONDITIONS

- 12 months recommended
- 20-85% Relative Humidity
- -5-40°C temperature



WEBSITE

<http://www.mingyo.com.cn>



Add: No.33 Ma'an Road,
Tongan Rare Earth Industrial Park,
Xiamen, Fujian, CN

Tel: 86-592-7032981
E-mail: vicky-zhang@minyo-ttr.com
lily.yang@minyo-ttr.com